

UHL INSTRUMENTS X3



Owner's Manual X3-1 / X3-2



IMPORTANT SAFETY INSTRUCTION



Please read the entire manual and the safety instructions. It contains all the information you need to use this unit. Don't skip any passages to ensure perfect operating of the instrument.



The product must be serviced by qualified service personnel only. **DANGER! Risk of electric shock.** Do not open the chassis. There are no user serviceable parts inside. The unit should only be serviced by qualified service staff.



Unauthorized opening of the chassis or malpractice of the unit will void warranty. The device may be used only to its intended usage. Please operate the instrument only according to these instructions.



Mains

Before connecting the unit to the mains power supply, please check voltage. The unit can be powered with 100VAC up to 240VAC. Use the correct power cord. Do not use a damaged power cord or plug.



Humidity

To reduce the risk of fire or electric shock, do not expose the unit to rain or moisture. Never place containers with liquid on the unit. Do not use the unit near water, e.g. swimming pool, bathtub or wet basement. If the unit is moved from a cold place to a warm room, condensation may occur inside. To avoid damage please allow the unit to reach room temperature before switching on.



Installation

Always place the unit on a stable keyboard stand or table. Protect the unit from strong impact. Do not drop it!



Cleaning / Maintenance

Never use any abrasive detergent, which may damage the surface. We recommend a slightly moist micro-fibre cloth. Do not allow any liquids (water, soft drinks, etc.) to penetrate the unit.



Packaging

Please keep all packaging, and use it to protect the keyboard when transporting, e.g. if servicing is required.

Table Of Contents

IMPORTANT SAFETY INSTRUCTION	2
Introduction.....	5
X3 Overview.....	5
Backpanel Connections.....	6
Connecting the Power Cable	8
Console	9
Startup	10
Connecting the Power Cable:	10
Audio Connections.....	10
Volume/Expression-Pedal Input	11
Foot Switch Input.....	11
Controls	12
Drawbars.....	12
Percussion.....	12
Chorus/Vibrato	13
Internal Rotary-Cabinet Simulation	13
Hall / Reverb	14
Split-Mode	14
Common-Presets	15
Audio Output Configuration A/B	16
Tone-Control.....	16
Volume Amp122	17
Volred (Main-Out + Headphone).....	17
MIDI	18
MIDI-IN (2x)	18
MIDI-OUT.....	19
Menu/Display	20
Save Mode	20
Factory-Presets	21
Change Factory-Presets	22
Split Mode.....	22
Transpose	23
AudioJ Conf A und AudioJ Conf B	23
Vibrato/Chorus Group	23
Percussion Group.....	24
Generator Group	24
Reverb Group (Hall)	25

Rotary Simulation Group	25
Connecting to a PC.....	26
USB:	26
„X3 Remote“ Instruction Manual	26
OS Updates	28

Introduction

Thank you very much for choosing an Uhl-Instruments X3-1 or X3-2. You have obtained a state-of-the-art model of a vintage organ. We recommend that you read the entire manual carefully to take full advantage of all the functions of your new Uhl-Instruments X3. Please keep this manual for later reference. We also recommend you to keep all packaging to protect the instrument if transporting is required.



X3-1 and X3-2 have identical connection jacks and controls. Hence both models are referred to under the name X3 in the following.

X3 Overview

The HOAX sound engine of the Uhl-Instruments X3 organs fully matches the vintage electromagnetic organ sound, including rotary cabinet, spring reverb and pedal sustain. This sound engine features completely new principles of electronic sound generation. An exact physical model of the famous vintage organ delivers the most authentic organ voices imaginable. It doesn't use computers, signal processors, sample players or analog electronics. Instead, the layout of vintage organs has been transferred to a detailed physical model. HOAX does not emulate the sound; it rather **creates** the sound in real-time – just like real magnetic wheels.

The percussion has that gorgeous round wooden "clonk" (remember "Child in Time"?). The smacking produced by the tone generator gets under your skin, especially in connection with percussion on. We recreated even the smallest details of the finest sounding vintage organs. No computers, no samples and no DSPs are used to comprehensively mimic all the characteristic sound details. To take a single example: the Chorus/Vibrato can't be distinguished. No wobbling! Switch it on and enjoy that silky C/V shimmer, long-desired by clonewheel players.

The innovative sound generation boasts a great number of advantages: there is absolutely no perceivable key-to-audio latency since the 91 magnetic wheels are continuously running, just like in a magnetic wheel generator. Polyphony is unlimited. No lost notes, even if all keys are pressed simultaneously. And the total absence of unwanted phase relations between the magnetic wheels makes the sound of the Uhl-Instruments X3 so incredibly lively and natural.


All the sought after „shortcomings“ were taken over as well:

Leakage /crosstalk, magnetic wheel slip and flutter, harmonic distortion and output voltages of pickups and filters - and of course the typical „keyclick“. The X3 keyclick is not just an added noise signal. It is dynamically produced by random "chatter" of key contacts, dependent on key velocity. Other features are: Chorus/Vibrato based on a digitally recreated LC delay line, Percussion in all variations, foldback and precise tapering. Drawbar response is immediate and responsive, just like a vintage organ.



Warning! Playing an Uhl X3 organ is highly addictive!

Backpanel Connections

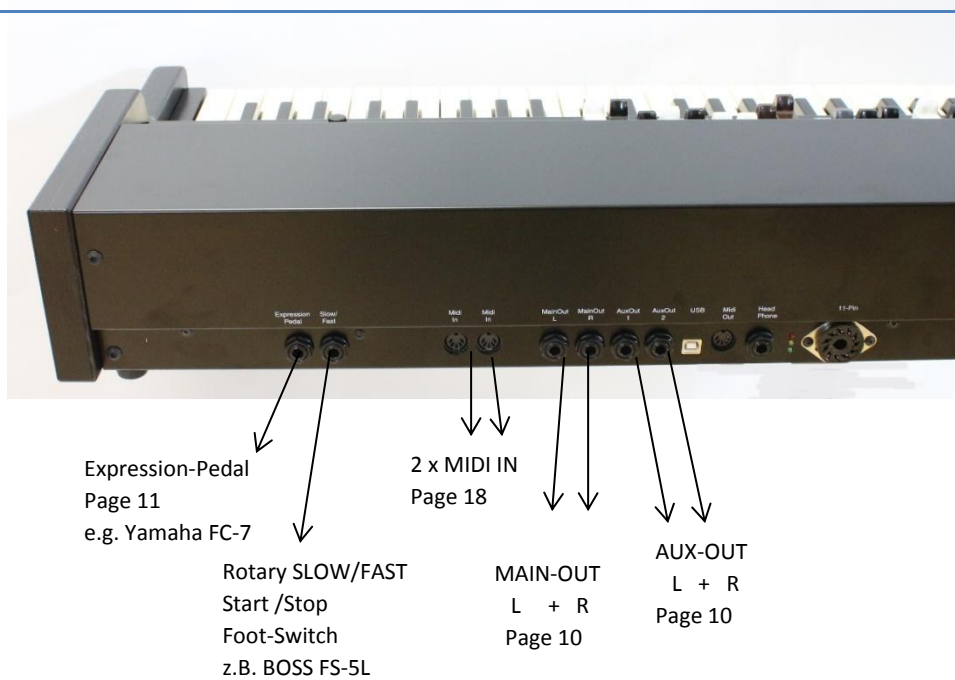

Expression-Pedal: The pedal jack can be used with a Yamaha FC7 or similar expression pedals


Rotary SLOW/FAST: Supports latch mode footswitches with stereo plugs. Momentary switches are not supported. Pin configuration: Tip = SLOW/FAST, Ring = RUN/STOP

2 x MIDI IN: These inputs can be used to connect a controller keyboard for Lower Manual (Midi channel 2) and a Midi pedal for pedal bass (Midi channel 3).

|

Main-OUT L + R: Standard audio output for standard instrument cables (TS Male ¼). The audio routing can be configured with the display/menu-panel (see page 20).

AUX L + R: Auxiliary audio output for for standard instrument cables (TS Male ¼). The audio routing can be configured with the display/menu-panel (see page 20).

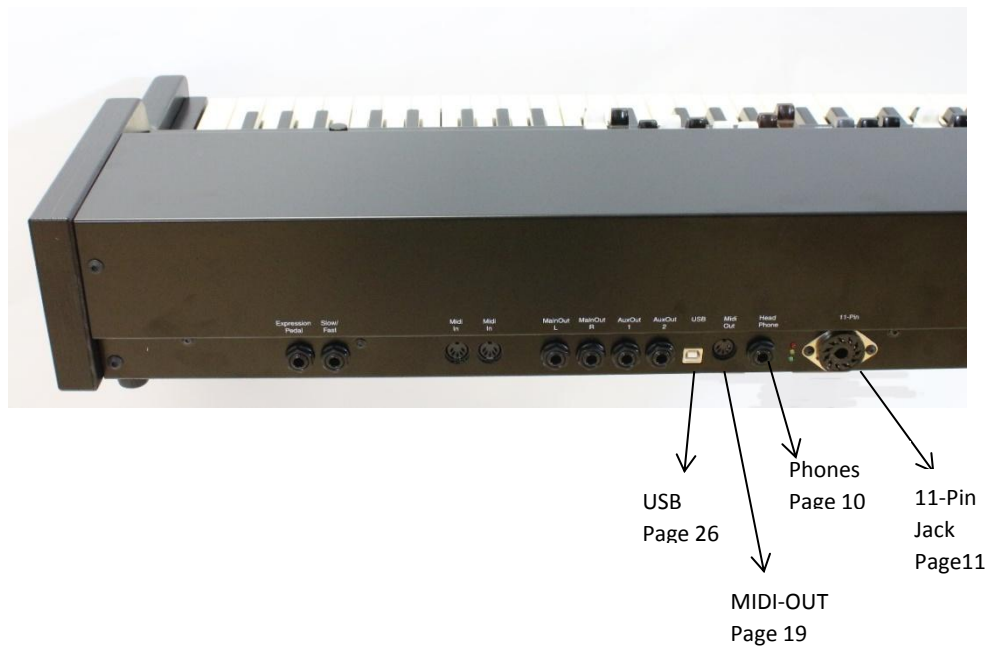


USB: This is only for connecting to a PC for using the X3-Remote software (no USB-Midi). Please see page 26 for a X3 Remote software instruction.

MIDI-OUT: The X3 can be used as a velocity sensitive controller keyboard. External sound modules or synthesizers can be played together with the organ sound of the X3.

PHONES Jack: This is a stereo jack for connecting headphones.

11-Pin Rotary Jack: For connection of an external rotary cabinet (see page 11)

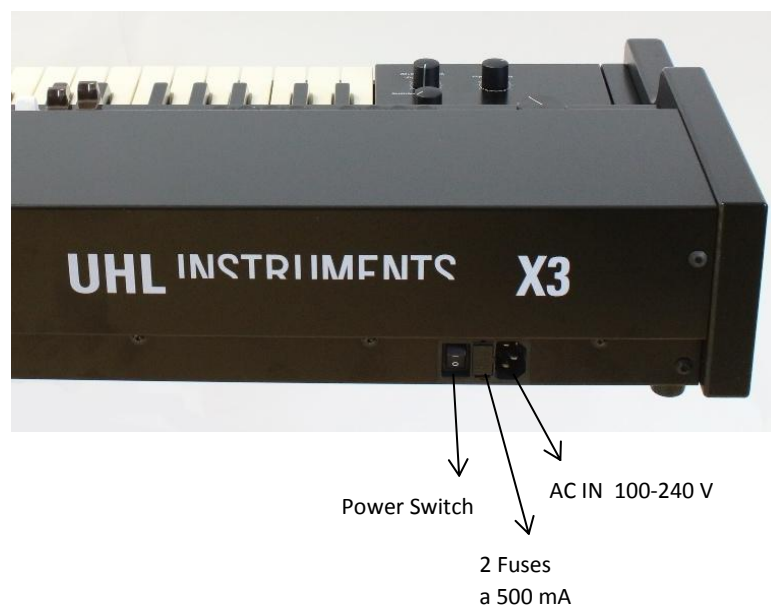

Power Switch (see page 8)

Connecting the Power Cable

The X3 runs on AC power: 100, 120, 230, or 240 volts at 50–60 Hz. The voltage level is set automatically. Make sure the X3 power switch is set to off before you connect the power cable. Plug the cable into a grounded outlet only.




Make sure that your power outlet delivers an appropriate voltage level as described above.



The power cable may vary according to the country where you bought your X3. Do not manipulate the cable or plug. If your power source does not have a standard grounded outlet, you should have a proper grounding system installed by an expert before using the X3. This will reduce the risk of a shock.

Console

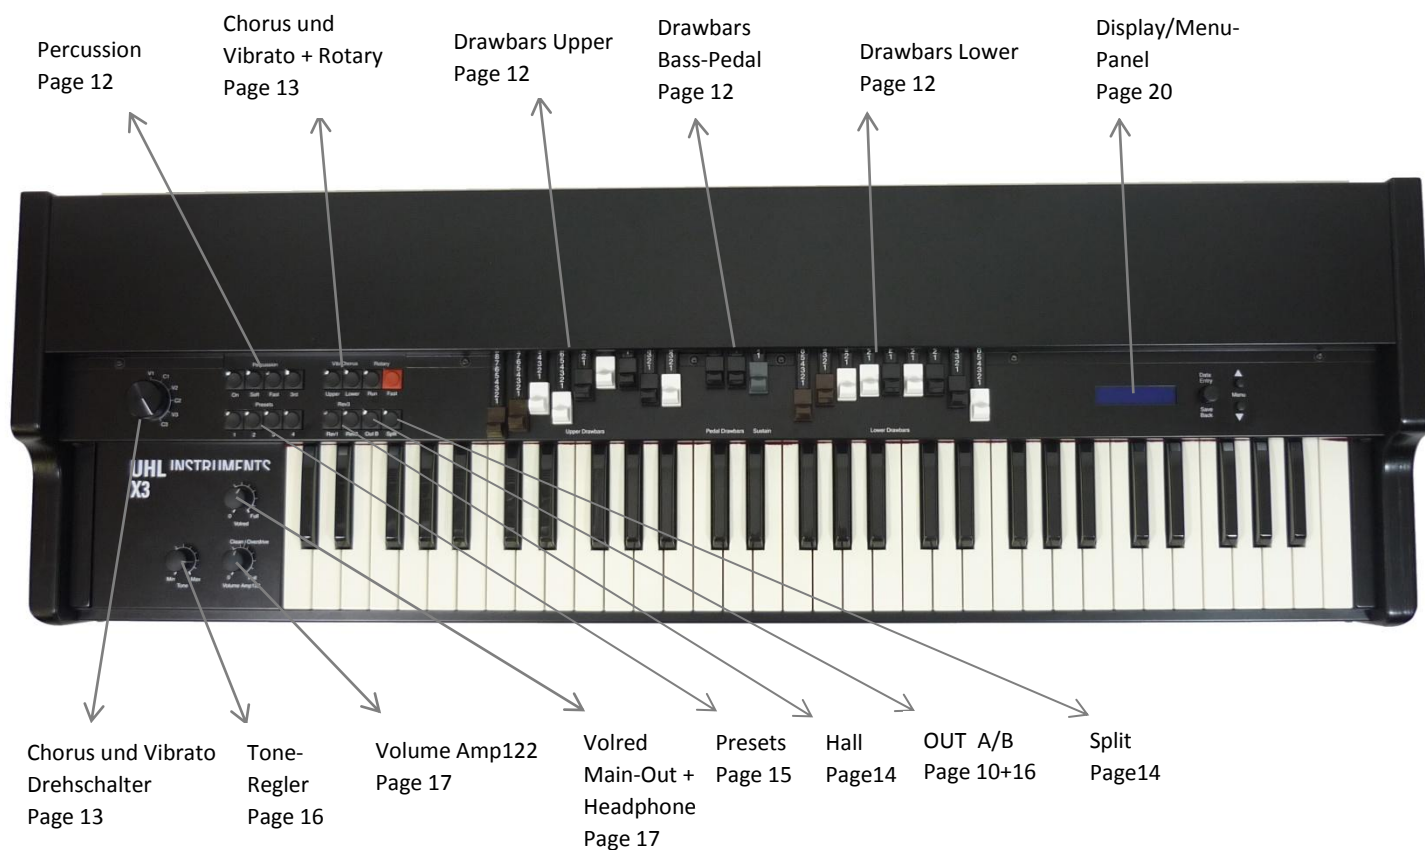

Startup

Connecting the Power Cable:

Make sure the power switch (see page 7) is set to OFF before you connect the power cable at the X3. Plug the power cable into a grounded outlet only.



The X3 runs on AC power: 100, 120, 230, or 240 volts at 50–60 Hz.

Audio Connections

Make sure your sound system is at a safe volume level. Also make sure that the X3's VOLUME knob (on the far left side of the front panel) is all the way down.

Plug in a pair of stereo headphones or run two standard 1/4-inch instrument cables from the MAIN outputs of the X3 to your amplifier or mixer for stereo. Use only one of the two outputs for mono.

AUDIO-Jacks:

The X3 features two pairs of audio jacks, MAIN-Out und AUX-Out (see page 6). These are standard ¼ inch jacks. The audio routing can be configured with the display/menu-panel (see page 20). The routing options are outlined below:

Configuration	Main-OUT L	Main-OUT R	AUX L	AUX R
ORG/PD - L/R	Organ Plain	Pedal	Rotary Left	Rotary Right
PD/ORG - R/L	Pedal	Organ Plain	Rotary Right	Rotary Left
L/R - ORG/PD	Rotary Left	Rotary Right	Organ Plain	Pedal
R/L - PD/ORG	Rotary Right	Rotary Left	Pedal	Organ Plain
ORG/L - PD/R	Organ	Rotary Left	Pedal	Rotary Right
L/ORG - R/PD	Rotary Left	Organ Plain	Rotary Right	Pedal
PD/R - ORG/L	Pedal	Rotary Right	Organ Plain	Rotary Left
R/PD - L/ORG	Rotary Right	Pedal	Rotary Left	Organ Plain
AMP/PD - L/R	Organ AmpSim	Pedal	Rotary Left	Rotary Right
PD/AMP - R/L	Pedal	Organ AmpSim	Rotary Right	Rotary Left
L/R - AMP/PD	Rotary Left	Rotary Right	Organ AmpSim	Pedal
R/L - PD/AMP	Rotary Right	Rotary Left	Pedal	Organ AmpSim
AMP/L - PD/R	Organ AmpSim	Rotary Left	Pedal	Rotary Right
L/AMP - R/PD	Rotary Left	Organ AmpSim	Rotary Right	Pedal
PD/R - AMP/L	Pedal	Rotary Right	Organ AmpSim	Rotary Left
R/PD - L/AMP	Rotary Right	Pedal	Rotary Left	Organ AmpSim

L/R = Rotary Cabinet Stereo-Simulation left/right , including Amp 122-Simulation (Overdrive)

ORG = Pure Organ signal

AMP = Organ-Signal with Amp 122-Simulation (Overdrive) but without Rotary Effect

PD = Bass-Pedal

MAIN-Out und AUX-Out jacks can be used with professional audio equipment like active speakers, mixers, PA, multicore /DI-Boxes, rotary cabinets (1/4 –inch plugs) and other such audio devices.

11-Pin Rotary Output:

The X3 is designed to connect with a 11-pin rotary speaker cabinet. When a physical rotary speaker is connected via the 11-pin plug, the [RUN] and [SLOW/FAST] control buttons perform the same functions as with the internal rotary simulation. The rotary speed can also be controlled with a foot switch like e.g. a BOSS FS5L (latch mode switch with stereo TS ¼ inch plug only! See page 6).

Volume/Expression-Pedal Input

Connect an expression Pedal like the Yamaha FC7 or similar (10k to 47k) here to control organ volume while you are playing (see page 6).

Foot Switch Input

Connect a 1/4" TS foot switch here to control the SLOW/FAST settings of the internal rotary simulation. The footswitch also can control a physical rotary speaker connected to the 11-pin jack. Attention! Please only use a latch mode switch like the BOSS FS5L. Momentary switches are not supported! To also control the RUN/STOP function in addition to SLOW/FAST a double foot switch is needed.

Controls

Drawbars



9 Drawbars Upper-Manual

16" 5 1/3" 8" 4" 2 2/3" 2" 1 3/5" 1 1/3" 1"

2 Drawbars Bass-Pedal

16" 8"


Sustain
Bass-Pedal

9 Drawbars Lower-Manual

16" 5 1/3" 8" 4" 2 2/3" 2" 1 3/5" 1 1/3" 1"

The X3 organ has 2 sets of nine drawbars, one for the upper manual and one for the lower manual plus 2 drawbars for the bass pedal. A third bass pedal drawbar controls sustain of the bass sound. The drawbars are used for adjusting the basic harmonics of the X3. This offers a wealth of sound shaping options. All 9 drawbars pulled out results in 9 different harmonic tones per key.


Percussion

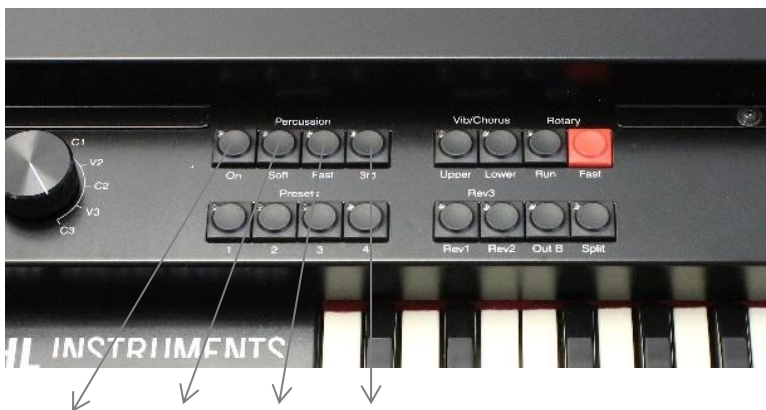

Percussion: ON/OFF SOFT FAST 3 RD

Percussion changes the attack characteristic of a note by adding an percussion signal to the note that is played. The volume of the percussion is adjusted by the SOFT button. Decay of the percussion signal depends on the FAST button setting. Frequency is selectable to be either the 2nd or 3rd harmonic of the played note. Percussion is "single triggered". To hear the percussion effect for every note requires that the currently pressed key is fully released prior to playing the next one. The percussion can only be enabled on the upper manual. All percussion parameters like volume, decay are programmable in the Menu/Display panel (see page 20).

Chorus/Vibrato

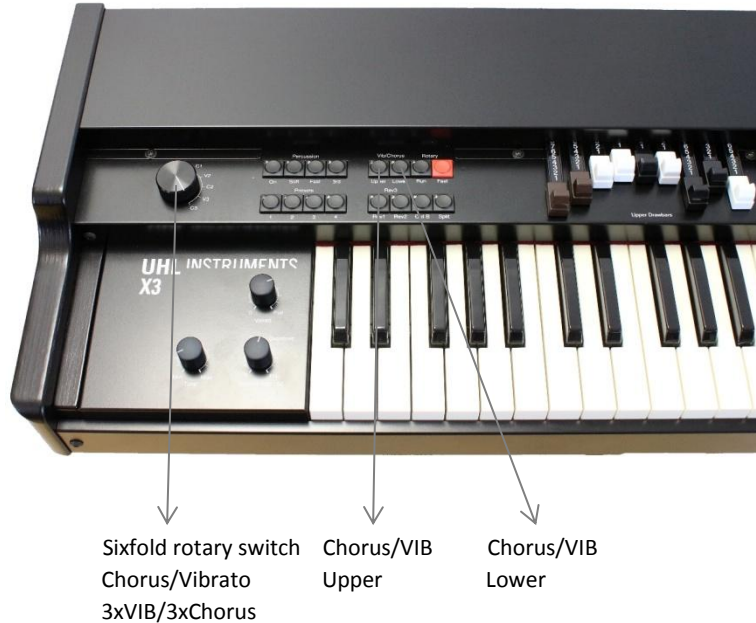

Rotary switch is used for selecting one of the six effects vibrato V1, V2, V3 or chorus C1, C2, C3. The two push-buttons Vib/Chorus Upper and Lower are used to switch the effect on/off, either for the upper or lower manual. Ex-factory the Vib/Chorus parameters are set according to a real vintage organ. All Vib/Chorus parameters are programmable in the Menu/Display panel (see page 20).

Internal Rotary-Cabinet Simulation



The X3 features a fully programmable rotary effect of the highest quality. It faithfully replicates the sound of a rotary speaker cabinet including tube saturation (Tube Drive).

To activate the included rotary speaker cabinet simulation the MAIN-OUT audio jacks must be routed to [L+R]. Please check the Menu/Display panel instruction on page 20.

Use the START/STOP button to switch on the internal rotary effect. Use the red SLOW/FAST button to switch between slow and fast rotary speed (Chorale and Tremolo). The LED in the START/STOP button indicates the rotary speed.

The rotary effect is fully programmable with the Menu/Display panel (see page 20). Many parameters like speed, acceleration, horn/bass balance and distance of microphone placement can be adjusted to taste.

Hall / Reverb



The X3 features a well-balanced reverb which emulates a vintage spring reverb.

There are four reverb levels available: OFF, REV 1, REV 2 and REV 3.

To activate the reverb press one of the buttons [REV1] or [REV2]. To obtain reverb level REV3 both buttons [REV1+ REV2] must be pressed simultaneously. The individual levels of REV1, REV2, and REV3 can be adjusted to taste in the Menu/Display panel (see page 20).

Split-Mode

Keyboard split is available for the lower or upper manual with a selectable split point. Two keyboard zones are easily set up by assigning any desired key split zones.

- **Lower to Upper:** Press the key of the desired split point on the upper manual, hold while pressing the [Split] button. Now the left part of the keyboard plays the Lower Manual. Use the right-hand drawbars to adjust the Lower Manual sound.
- **Pedal to Upper:** Press two adjacent keys at the desired split point on the upper manual, hold both keys while pressing the [Split] button. Now the left part of the keyboard plays the Pedal Bass. Use the Pedal Bass drawbars to adjust the Pedal Bass sound.
- **Pedal to Lower (X3-2 only!):** Press two adjacent keys at the desired split point on the lower manual, hold both keys while pressing the [Split] button. Now the left part of the lower keyboard plays the Pedal Bass. Use the Pedal Bass drawbars to adjust the Pedal Bass sound.

The split point will be saved automatically until the X3 is switched off.


Common-Presets

The X3 provides 14 common presets. All settings of a sound are stored in these presets, such as percussion, chorus/vibrato, reverb, split and audio-out routing. If none of the four LEDs is lit, the "live" setting is selected which means that drawbars and buttons are used to adjust the sound. When pressing a preset button the stored preset sound is recalled. Pressing the button again switches the X3 back to "live" setting.



14 „Common“ Presets (Buttons 1–4)

Storing a preset: After you adjusted a sound to your liking press a preset button of your choice and keep it pressed until the LEDs of all preset buttons start blinking. Then release the button. Your preset is now stored and can be recalled with the respective button.

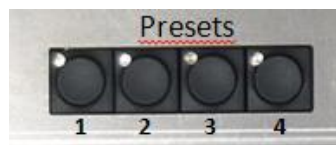

Common-Presets:

The number of common presets is derived from different combinations of the 4 preset buttons. Up to 3 buttons can be pressed simultaneously to store and recall a preset:

Example 1: The preset named 1 is button 1.

Example 2: The preset named 32 is a combination of the buttons 3 + 2.

Example 3: The preset named 23 is a combination of the buttons 2 + 3.

In total there are 14 presets available.

What is stored in a common preset?

- Drawbar settings (upper, lower, pedal)
- Settings of percussion, reverb, chorus/vibrato, split, rotary, audio routing

Audio Output Configuration A/B



HX3 generates selectable output signals: stereo rotary simulation = L/R, plain organ = ORG, bass pedal = PD and organ with tube amp simulation = AMP.

The X3 output signals can be routed to any of the 4 jack s of the two output pairs MAIN OUT and AUX OUT. Two configurations are available, so you may set these for your own needs and toggle between them with the OUT B button on the panel board.

- **AudioJ Conf A** sets audio jack configuration A
- **AudioJ Conf B** sets audio jack configuration B

The audio output routing is fully programmable with the Menu/Display panel (see page 20).

Tone-Control




Cranked up high frequencies accentuate the key click and percussion. Turn the knob counter-clockwise to reduce high frequencies.



It is recommended to discreetly dial back the high frequencies if the X3 is played with very high volume levels during live performance.

Volume Amp122

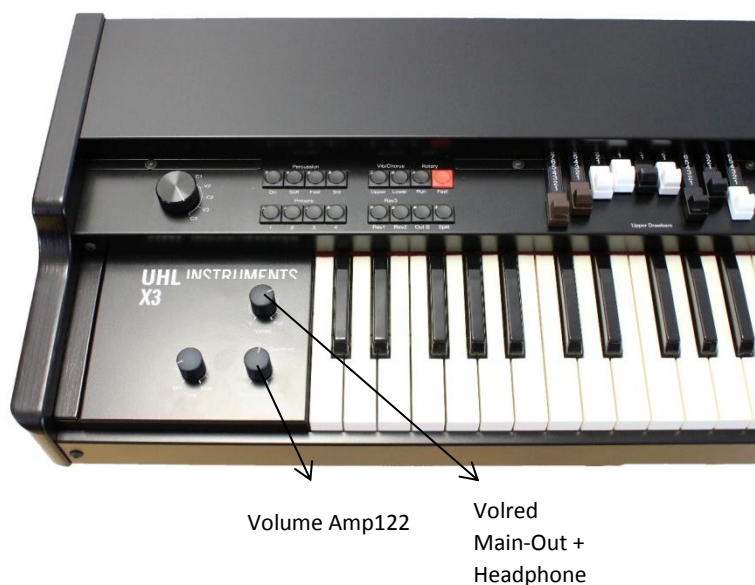

In addition to the accurate rotary simulation the X3 also features a separate 122 amp output. It emulates the sound and characteristics of the 12BH7 tube and the two 6550 tubes. The tube amp overdrive starts from the center position of the volume control. Turning the volume control clockwise adds more harmonic tube overdrive.

Volred (Main-Out + Headphone)

The intensity of the overdrive increases loudness with increasing volume level. Full overdrive can increase the total volume level too excessively. To accommodate that many clonewheels just add an unvariable monotonic overdrive. This entails limited overdrive dynamics and unnatural sound. Not so with the X3! The X3 features an additional post-overdrive Volred (= volume reduction) control. The Volred control allows for fully dynamic tube overdrive at reasonable total volume levels.

Settings:

- Volred fully turned clockwise = no volume reduction.
- Volred turned counter clockwise = reduced volume level including overdrive at MAIN-OUT jack/headphone jack (Volume Amp122 control must be turned clockwise!).


MIDI



MIDI-IN (2x)

The two Midi inputs can be used to connect a controller keyboard for Lower Manual (Midi channel 2) and a Midi pedal for pedal bass (Midi channel 3) to obtain a fully fitted magnetic wheel vintage organ.

Example X3-1:

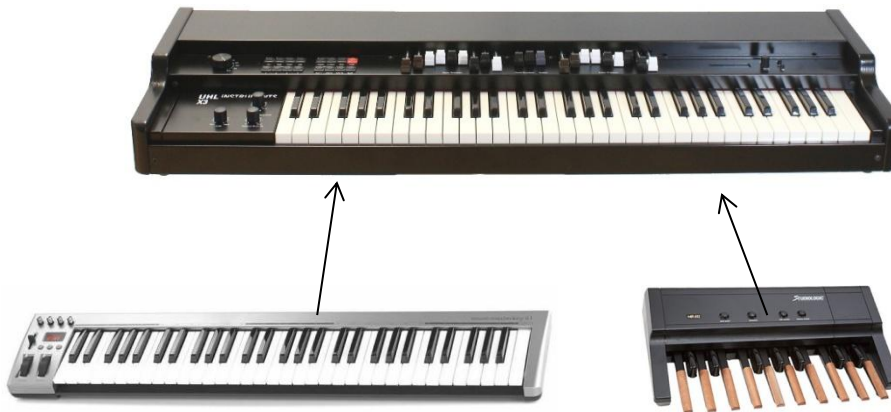

To play the „Lower“ of the X3-1:

Connect a MIDI-KeyBoard to one of the both MIDI-IN-Sockets of the X3-1. To play the Lower select MIDI Channel 2

To play the Pedal-Bass of the X3-1:

Connect a MIDI-KeyBoard to one of the both MIDI-IN-Sockets of the X3-1. To play the Lower select MIDI Channel 3

Example X3-2:



To play the Pedal-Bass of the X3-2:

Connect a MIDI-KeyBoard to one of the both MIDI-IN-Sockets of the X3-1. To play the Lower select MIDI Channel 3


MIDI-OUT



MIDI-OUT

The Midi-Out can be used to connect a sound module or synthesizer which then can be played together with the organ sound of the X3. This way the X3 can be used as a velocity sensitive controller keyboard.

Menu/Display

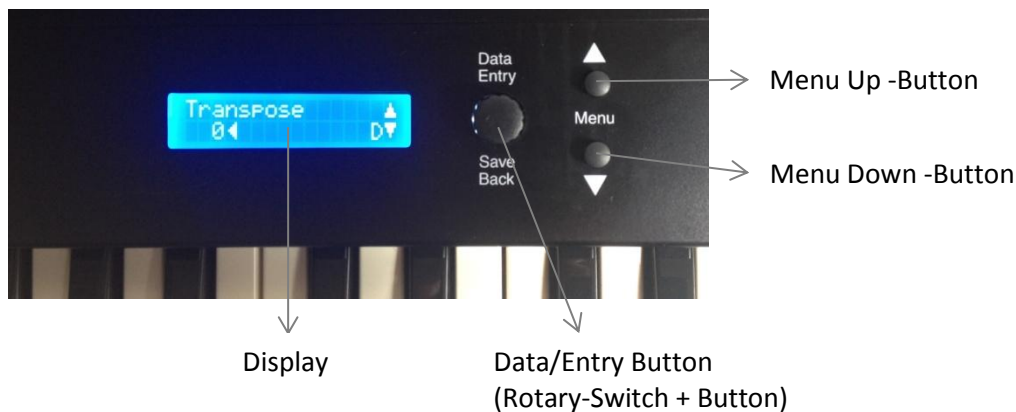

Menu Panel Display Controls

The menu panel display offers full access to many X3 parameters like percussion, chorus/vibrato, keyclick, rotary-cabinet, reverb, factory presets, leakage, tapering. All parameters can be stored individually.

Use **Up/Down buttons** to scroll through menu items.


Use the **Data Entry** incremental encoder knob to change parameter values by turning the knob either right or left. A changed parameter is indicated by an asterisk in the display. To **store** changed settings **press** the **Data Entry** rotary knob for 2 seconds until the [Saved] message appears. Hereafter the asterisk disappears.



If you change more than one parameter, every single parameter change must be stored individually. To find parameters which have not been stored, just use the Up/Down buttons to scroll through the complete menu and look out for asterisks. Then press the Data Entry knob for 2 seconds to permanently store each parameter still showing an asterisk.

Save Mode

Press the Data Entry knob for 2 seconds to permanently store parameter changes. The asterisk disappears after saving.



→ The organ was transposed by a semitone – the Change is active but not stored for future: Asterisk appears




→ The change has been saved for the future: the asterisk is no longer displayed.

Factory-Presets

Live-Preset (= Preset 0, current drawbar status after switch-on)

The following message appears on the display:

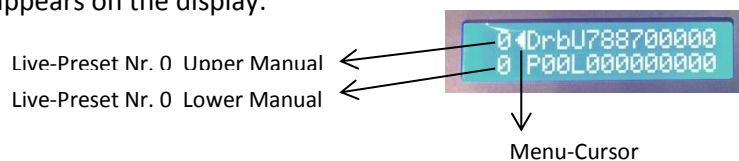


Initially after switch-on the Live-Preset will be indicated (= Preset 0). The upper line indicates the drawbar settings of the upper manual (U), the lower line indicates pedal drawbars (P) and lower manual (L) settings.

Factory-Presets

The X3 provides 14 presets each for the upper and lower manual. Use the Up/Down buttons to move the cursor to the upper or lower manual. Then turn the Data Entry knob to select one of the 14 presets for each manual.


In the following picture the cursor is located at lower manual for which preset 6 is selected. For the upper manual preset 4 is selected.

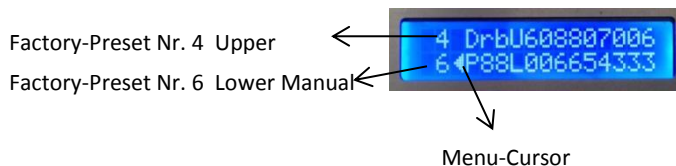

Change Factory-Presets

All 14 factory presets can be replaced by your own favorite presets.

In the following example we change factory preset no. 6 for the lower manual.

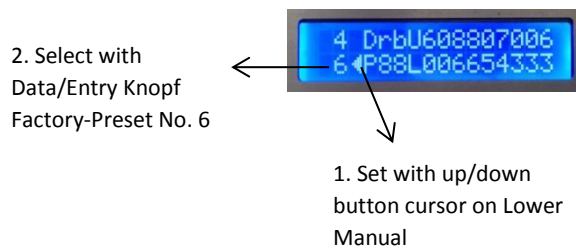


Press the Down button as many times until the display indicates the 9 drawbars of the lower manual. Adjust the drawbars either with the Data Entry knob or with the physical drawbars. Then press the Data Entry knob for two seconds to store the preset. Now you created your own lower manual preset no. 6.



The factory presets of the upper manual are changed equally: move the cursor to the upper manual → select the preset number with the Data Entry knob → then press the Up button as many times as required to get to the drawbar settings → change drawbar values as described above → press the Data Entry knob to store your settings.

Split Mode

There are 3 options in split mode (see page 12): PedalToLower
LowerToUpper
PedalToUpper



Transpose

Transpose function offers either **6 semitones down** or **7 semitones up**.




Annotation: only 5 octaves are possible. Transpose cannot generate tones outside these 5 octaves.

AudioJ Conf A und AudioJ Conf B

Switches between two output configurations which can be set individually.


- **AudioJ Conf A** sets audio jack configuration A
- **AudioJ Conf B** sets audio jack configuration B.

Use the [OUT B] button to switch between the two configurations A/B (see page 16).



Vibrato/Chorus Group


The chorus/vibrato menu can be used to adjust the C/V effects individually.



Amplitude-modulation and Reflections of Vibrato-Delay-Line V1/C1



Frequency Modulation of V1/C1



„Dry“ - unmodulated share of Vibrato/Chorus-Mix - C1 C2 und C3



„Wet“ -FM/AM modulated share of Vibrato/Chorus-Mix - C1 C2 und C3

Percussion Group

The percussion menu can be used to individually adjust the settings.



Percussion-Level **NORMAL**




Percussion-Level **SOFT**



Percussion-Decay-Rate **LONG**



Percussion-Decay-Rate **SHORT**



Reducing volume of the drawbars at Perc-Normal
(For value 250 the volume of the drawbars is not reduced).

Generator Group


The generator menu can be used to adjust typical generator settings



Slip and mechanical balance of tone Wheels




Leakage (4 Presets)
Clean, New Organ, Old Organ, Sleazy Organ




Cap-Set - Generator (4 Presets)
Year 1955, Year 1961, Year 1972, Recapped




Disabled drawbars 1 "when Percussion is enabled (ON Pos.)
In pos. OFF works drawbars 1 "despite active percussion




Harmonic foldback 16 "1 octave repeats (4 presets)
Foldback, Full, Foldb muted, muted Full




Tone is set with tone control button (page 16)




Simulates the tuning capacitor in the foot swell
Higher value = more volume with fine Overdrive



Simulates aged tube (higher triode distortion)



Key-Click Tone



Key-Click length












Reverb Group (Hall)

The reverb menu can be used to adjust the individual levels of REV1, REV2, REV3.

	Length Hall 1
	Length Hall 2
	Length Hall 3

Rotary Simulation Group

The reverb menu can be used to adjust the individual rotary settings such as acceleration, horn/bass balance, and microphone positioning.

	Speed Horn SLOW
	Speed Rotor SLOW
	Speed Horn FAST
	Speed Rotor FAST
	Acceleration Horn SLOW / FAST
	Acceleration Rotor SLOW / FAST
	Deceleration Horn FAST / SLOW
	Deceleration Rotor FAST / SLOW
	Intensity (Mikrophon-Abstand)
	Stereo Width
	Volume Balance Horn / Rotor

Connecting to a PC

USB:

The USB connector is used for connecting the X3 to a PC for the X3-Remote software. The most recent firmware and remote software updates can be downloaded from our web shop at www.uhl-instruments.com

„X3 Remote“ Instruction Manual

- ! Open the folder you just copied from CD to your desktop
DoubleClick on the file „X3-Remote.exe“



The start window of X3 remote opens:

HX3 Remote

File Edit Actions Help

Close AH038JU0 - FT232R USB UART on COM4

Organ Leslie MIDI Custom CC Upper Lower Startup Advanced

Write Params Read Params EEPROM Write

#	Description	Value
455	TG Cap Set	2
456	No 1' with Perc On	0
457	Foldback 16' Mode	0
458	AO28 Tone Pot	46
459	AO28 Swell TrimCap	50
460	AO28 Tube k2	30
461	Contact Spring Flex	7
462	Contact Spring Damping	8
463	Reverb 1 Level	90
464	Reverb 2 Level	150
465	Reverb 3 Level	140
466	Horn Slow Timer	17
467	Rotor Slow Timer	14
468	Horn Fast Timer	140
469	Rotor Fast Timer	110
470	Horn RampUp Time	0
471	Rotor RampUp Time	12
472	Horn RampDown Time	0
473	Rotor RampDown Time	18
474	Rotary Throb	190
475	Rotary Spread	100
476	Rotary Balance	100
477	Scan Core (Board)	2
478	No Drawbars (Expander)	0
479	ButtonMask Pins PL7	0

Leslie Run Leslie Fast Rev I Rev II JackConf Split On

HX3 Board Info

User Name: Uhl-Instruments

Serial #: 11916483

Organ Licence: 2233770 OK

Rotary Licence: 8511139 OK

FPGA #: 25042015

FW #: 3.806

Refresh Info

HX3 Firmware and FPGA Update

Update FW Update FPGA

Auto Restore at Firmware Update

Licences Organ Defaults

Midi Custom Presets

HX3 Response Messages

#0:254=3.806 [HX3 by CM 09/2010, DefaultBtnSw]
#0:3=621027349 [\$25042015]
#0:9910=0 [FPGA: #25042015 OK]
#0:9952=11916483 [SERIAL #]
#0:9950=2233770 [ORGAN #]
#0:9951=8511139 [LESL #]
#0:9990=0 [OWNER: Uhl-Instruments]
#0:9900=2 [SCAN: Fatar Rev#16 OK]

Finalize Settings

Use previous HX3 Board Info

User Name: User Name Organ Licence: 0 Rotary Licence: 0 Scan Board: OrganScan61

Send Licences Save to Board as Factory Defaults

No Drawbars Tone / Amp Vol Pot Enable

Finalize

The X3 must be switched off before the USB cable is connected.

- Connect the USB cable from your PC to the X3
- Switch on the X3
- Click on the button [Device]
- In the following window double click on „Device.....“in the first line.

Click auf **Button Device**

USB Device opens

Now double-click on this line




Now your X3 is connected with the remote editor.
The editor window should indicate the following:

-Serialnumber
of Firmware

-License numbers

-Firmwareversion
(FPGA und AVR)

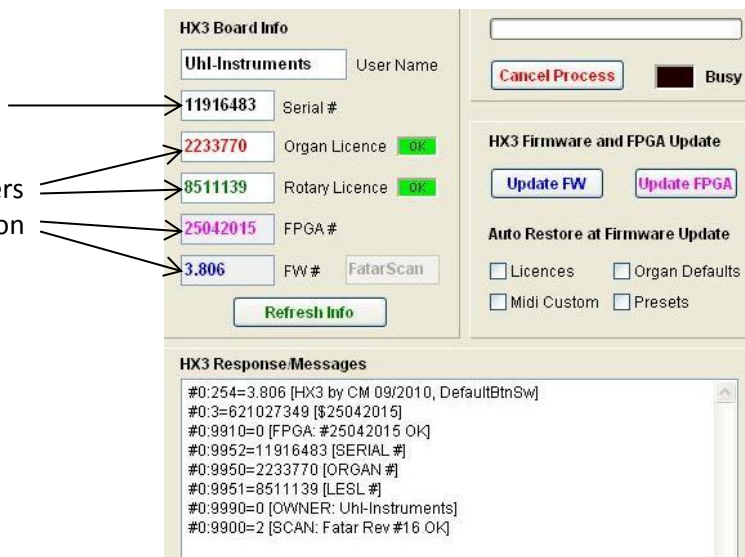


The serial and license numbers can be found on the type plate on the bottom Organ.

OS Updates


Firmware updates will be available for download on our website www.uhl-instruments.de. After download unzip and extract all files to a new folder on your desktop. Then repeat the steps described under „X3 Remote“ **Instruction Manual** (see page 26).

Update Sound Engine (FPGA)

1. Click on the button **[FPGA]**

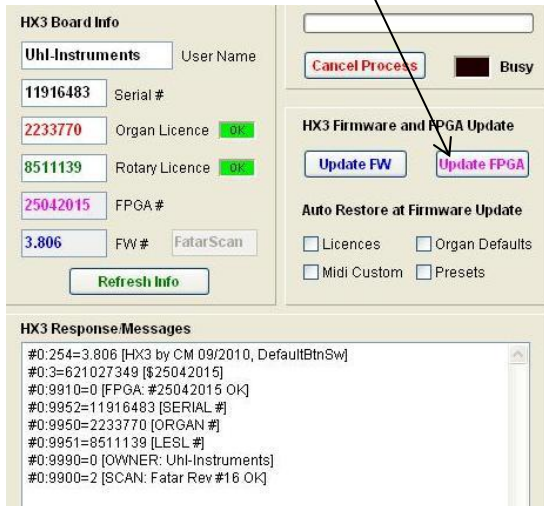

Opens

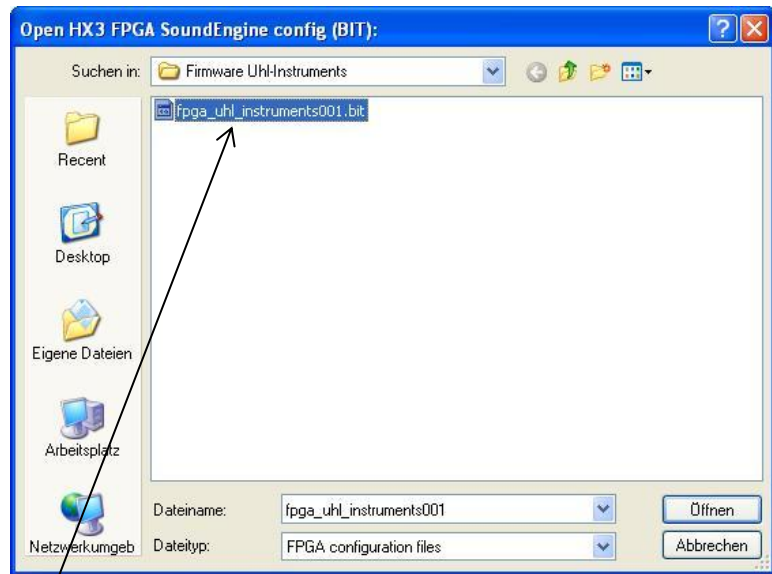


2. Doubleclick on FPGA-file „fpga_uhl_instruments001.bit“


! FPGA update process takes about 3 minutes. Please wait until the FPGA update is finished before you go to the next step.

Update Controller Firmware (AVR)

1. Click on the button **[Update FW]**

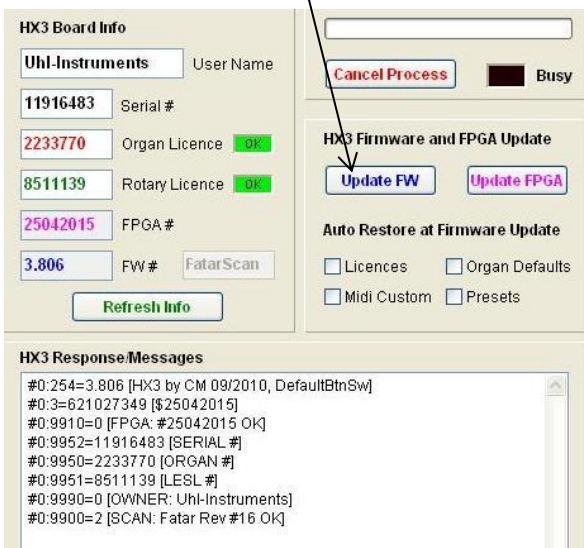


Opens

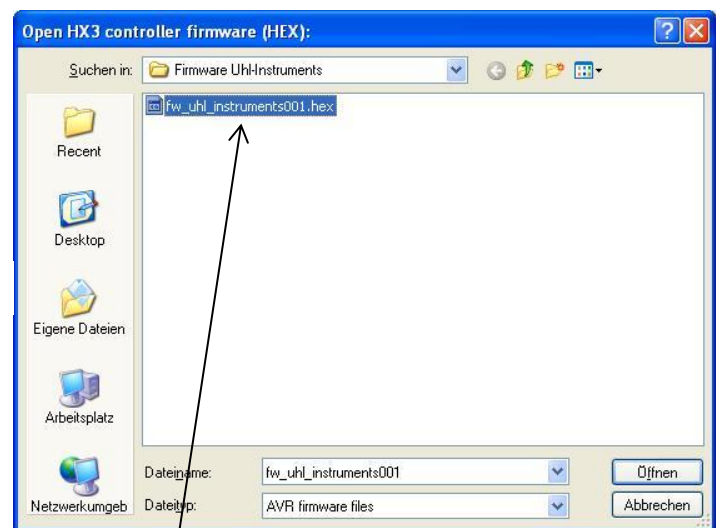

2. Doubleclick on „fw_uhl_instruments001.hex“

! AVR update process takes about 3 minutes. Please wait until the AVR update is finished before you go to the next step.

To finish the update click the button [Finalize]

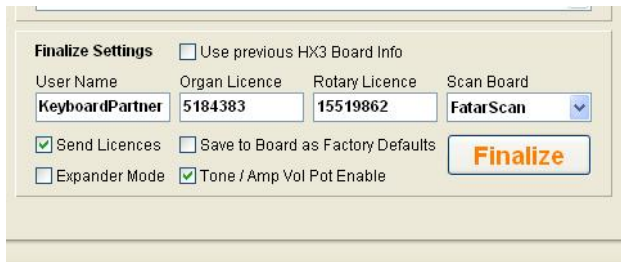

Finalize Settings ☐ Use previous HX3 Board Info

User Name	Organ Licence	Rotary Licence	Scan Board
KeyboardPartner	5184383	15519862	FatarScan

☒ Send Licences ☐ Save to Board as Factory Defaults ☐ Expander Mode ☒ Tone / Amp Vol Pot Enable

Finalize



Your serial number and your license numbers for the organ and rotary are printed on the type plate of your X3. The supplied declaration of conformity and your invoice also include your serial and license numbers.